STARK
STRONGLY CHOSEN
SINCE 1980

# **STARK** RC REEL CRUSHER

ROADSIDE MAINTENANCE




- **An efficient attachment for maintaining roadsides and verges. It excels in mowing grass and mulching brush up to 7 cm in diameter.**
- **Designed for 5–15-ton boom-equipped machinery with a bolt-on interface, making it compatible with all adapter plates.**

- Features an adjustable displacement motor with a hydraulic flow requirement of 55–150 l/min, enabling versatile use across different carriers.
- The standard float / protection device simplifies operation. In case of impact, the device lifts and retracts the attachment, minimizing or preventing damage.
- The flail hammers mulch material in a controlled manner, making it suitable for use in urban areas.
- The support roller allows adjustable working height between 5–20 cm.
- Front chain protection and rear rubber guard reduce material ejection.

## STANDARD EQUIPMENT

- Float / protection device
- Rotor with flail hammers
- Bolt-on interface plate
- High-tensile steel S420 chassis
- Replaceable wear plates inside the chassis
- Two rows of replaceable hardened STATIC BLADES
- Front chain curtain
- Rear rubber protection
- Reinforced support roller, adjustable height 5–20 cm


## OPTIONAL EQUIPMENT

- Dual Y-blades





## TECHNICAL DRAWINGS

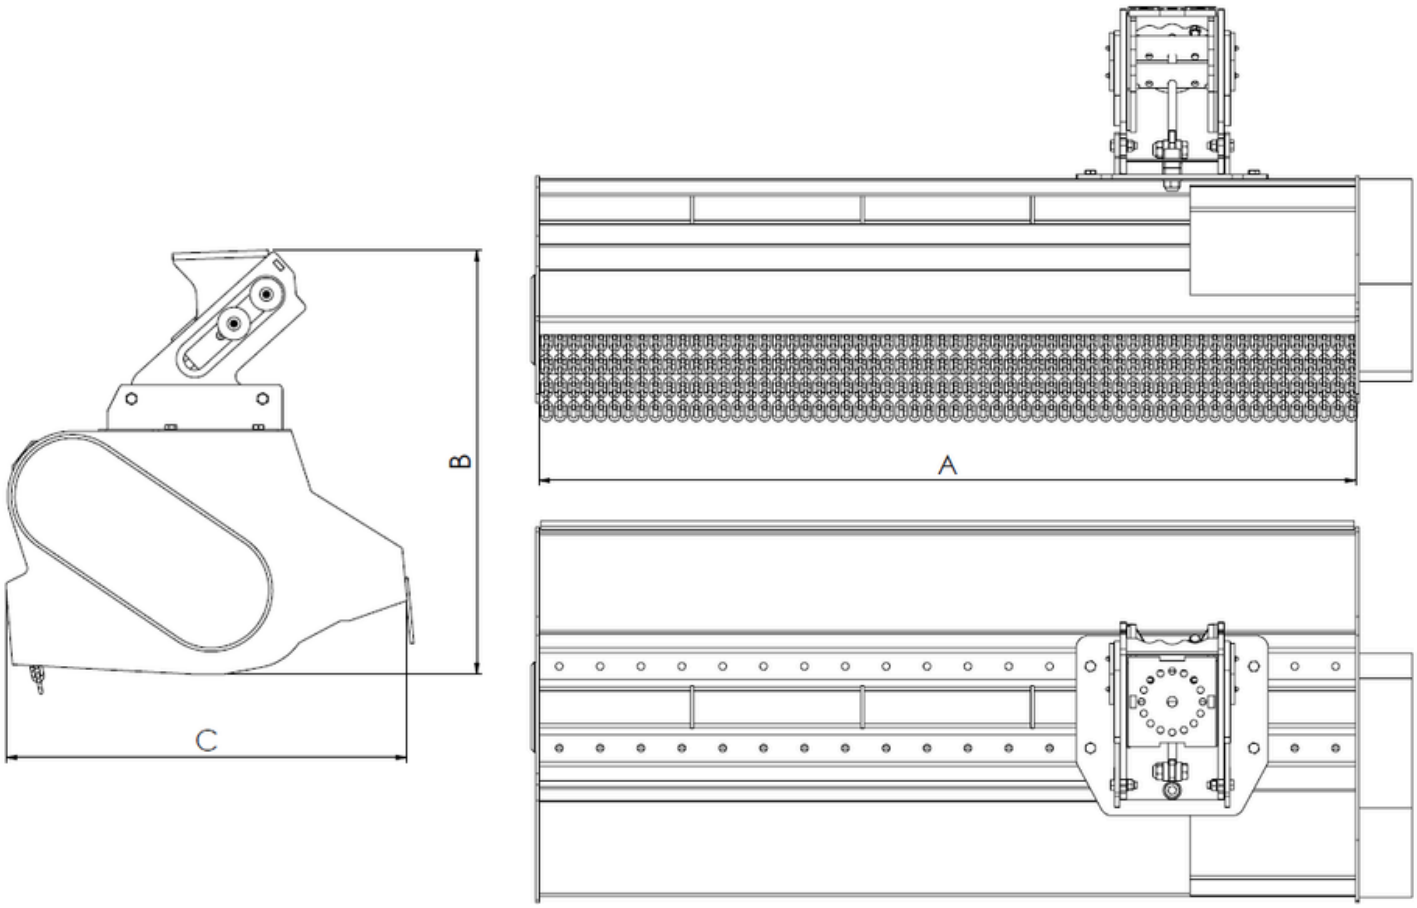


## TECHNICAL DIMENSIONS

| Product | Working width (mm) | Height (mm) | Depth (mm) | Weight (kg) * | Belts (qty) | SMO flails - standard (qty) |
|---|---|---|---|---|---|---|
| RC 2000 | 2000 | 570 | 970 | 650 | 4 | 21 |

* Weight include float / protection device.

2026•9 Lametal Oy reserves the full rights to change at any time without ogligation providing equipment , prices and technical solutions , without prior notice.